


SLIDING FLY SCREENS

Two powder coated aluminium framed fly screens, each screen moving independently in the sliding track of the outer framework allowing easy movement and access to windows.

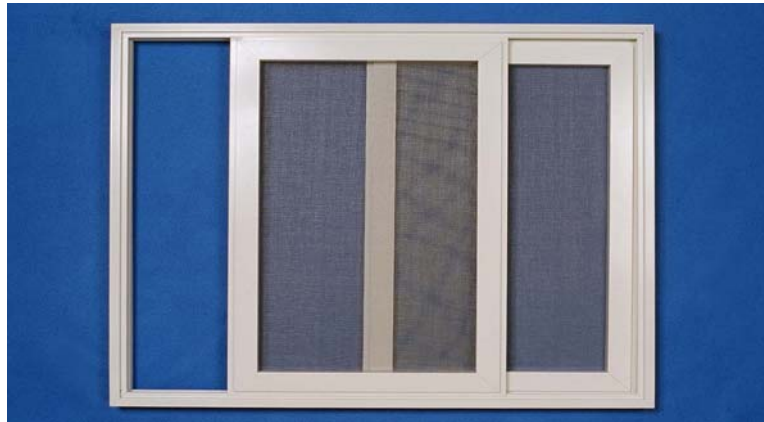

How they work	The rigid aluminium outer framework is fitted to the inside or the face of the window reveal. Each screen, when closed, overlaps in the centre providing a seal between the screens and outer framework.
Suitability	Can be used in front of any window that has a reveal. Cost effective when screening a window with multiple opening lights. Can be made with multiple sliding screen panels for extra wide windows. When modified slightly, this unit can be made to work vertically with both screens moving up and down, this makes it ideal to install in front of a sliding sash window. Units can be made any size making them suitable for windows and patio doors.
Removal	Outer framework cannot be removed. To remove screens, lift up and out.
Maintenance	The powder coating can be cleaned with a cream cleaner to restore its original condition. All meshes should be cleaned with warm soapy water to remove grease and dirt. Stainless Steel mesh can be power washed if desired. Dusty screens should be vacuumed or brushed clean.
Technical	Standard colour – White Fibre Mesh – 18 x 16 weave, grey Stainless Steel – 16 x 16 weave, Natural.
Guarantee	12 months on all workmanship under normal wear and tear.